

MBQ12SB4

INSTALLATION MANUAL

MAXXSONICS USA, INC.
1290 Ensell Road
Lake Zurich, Illinois 60047 USA
E-Mail info@maxxsonics.com
Website www.maxxsonics.com



Congratulations!

With the purchase of an MB QUART car hi-fi subwoofer/enclosure combo, you have purchased a technically sophisticated, high-quality product. MB QUART feels confident that you will enjoy your new Subwoofer System. If you are not having the installation carried out by an Authorized MB Quart Dealer, please read the following installation instructions carefully.



FEATURES

ENCLOSURE HIGHLIGHTS:


- 3/4" MDF Ported Enclosure
- 2.0 Cubic Feet Internal
- 4" Port With Rounded Lip To Decrease Turbulence
- 2 Protective Chrome Bars Over Subwoofer Cone
- Embroidered MB QUART Logo On Top Of The Enclosure
- Gold Plated Push And Twist Speaker Terminals
- OEM Grade Carpeting

SUBWOOFER HIGHLIGHTS:

- 12" Subwoofer
- Single 4 Ohm Voice Coil
- Stamp Steel Basket
- 40oz. Magnet
- 2" Voice Coil
- Polypropylene Cone
- Foam Surround
- 350 Watts rms / 700 Watts maxx



CONNECTIONS:

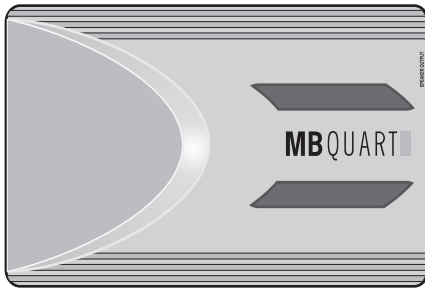


1. Verify that your amplifier is stable to 4 Ohms.
2. Follow all installation instructions from the manufacturer of your amplifier.
3. Connect the Positive speaker output from your amplifier to the Positive *Twist and Insert* terminal indicated by the **RED** band on the bottom of the terminal.
4. Connect the Negative speaker output from your amplifier to the Negative *Twist and Insert* terminal indicated by the **BLACK** band on the bottom of the terminal.



SECURING THE ENCLOSURE TO THE VEHICLE:

CAUTION: TO ENSURE THE SAFETY OF THE VEHICLE PASSENGERS, IT IS IMPORTANT THAT YOU FOLLOW THE INSTRUCTIONS BELOW FOR SECURING THE ENCLOSURE TO THE VEHICLE TO ENSURE THAT THE SUB BOX DOES NOT MOVE FROM ITS MOUNTING LOCATION IN THE EVENT OF AN ACCIDENT.

1. Purchase at least two “L” brackets from your local hardware store.
2. Purchase enough 3/4” drywall screws to fill each hole of your “L” brackets.
3. Attach the “L” brackets to either side of the enclosure as the diagram indicates.
4. Locate the area to secure your enclosure in the vehicle. **Be sure that the area you have chosen is not near the gas tank, brake lines, wiring or mechanical parts under the vehicle.** Pre drill each hole.
5. Attach the enclosure and “L” bracket to the vehicle as shown in the diagram.

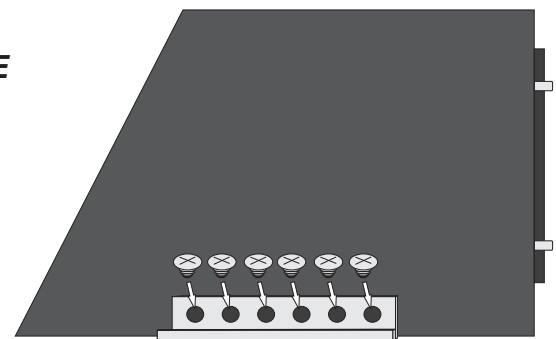

L BRACKET



DRYWALL SCREW

MBQ12SB4

WARRANTY

MAXXSONICS USA, INC.
1290 Ensell Road
Lake Zurich, Illinois 60047 USA
E-Mail info@maxxsonics.com
Website www.maxxsonics.com



As the manufacturer of MB QUART audio products, Maxxsonics USA Inc. warrants to the original consumer purchaser of the product to be free from defects in material and workmanship for one(1) year from the date of purchase.

This product meets the current EU minimum warranty requirements, if purchased in countries of the EU.

To ensure your warranty policy, keep your original receipt proving date of purchase.

All other parts and accessories sold with this product are warranted to be free from defects in materials and workmanship for one(1) year from the date of purchase. Maxxsonics will repair or replace at it's option and free of charge during the warranty period, any system component that proves defective in materials and workmanship under normal installation, use and service provided that the product is returned to the authorized MB QUART dealer from where it was purchased.

A photo copy of the original receipt must accompany the product being returned. In the absence of the above, the warranty is one(1) year from the date of manufacture.

There is no warranty for Unauthorized Internet Sales.

Any damage to the product as a result of misuse, abuse, accident, incorrect wiring, improper installation, alteration of the date code or bar code labels, revolution, natural disaster, or any sneaky stuff because someone messed up, repair or alteration outside of our factory or Authorized Service Centers and anything else you have done that you should not have done is NOT covered.

This warranty is limited to defective parts and specifically excludes any incidental damages connected therewith. This warranty is not construed as an insurance policy.

Warranty on installation labor, removal, re-installation and freight charges are not the responsibility of Maxxsonics USA Inc.

